

Replace the Producer II

Use this procedure to set up your replacement unit when you are completing a rapid exchange.

The term 'Producer II' is used throughout this document to refer to the Autostar II, Protégé II, Amigo II, and AutoPrinter II.

 **Note:** Your system may not look exactly like the system pictured.

Before you begin:


1. Stop or pause all jobs.
2. Power off the **external control center (PC)**.
3. Power off the **Producer II**.
4. Disconnect the **power cord** from the Producer II.
5. Remove the **cover** (Autostar II and Protégé II only).

1 Disconnect the autoloader cables.


At the back of the Producer II, disconnect the cables:

- **USB cable (Autostar II & Protégé II only)**
- **Power cord**
- **Serial cable**
- **FireWire Cable**

Autostar II and Protégé II

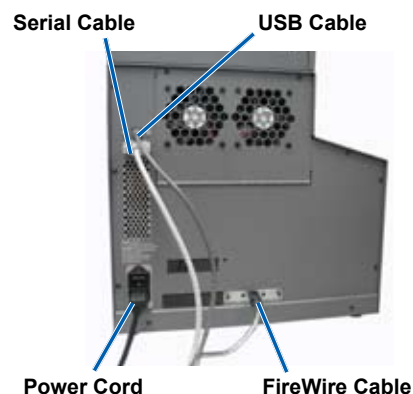

Amigo II or AutoPrinter II

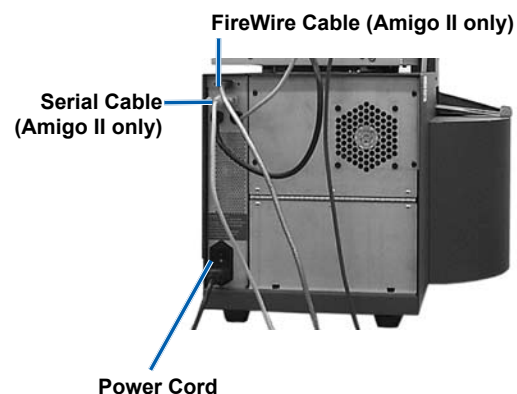

2 Remove the printer.

a. At the back of the printer, disconnect the cables:


- **Printer cable**
- **Printer power cord**
- **USB cable**

 **Caution:** Some cables in your system may be latched. Equipment damage may occur if cables are not disconnected appropriately.

b. Remove the **printer** from the Producer II and set it aside.


 **Caution:** Lift the Everest printer with care; it is very heavy.

Everest printer

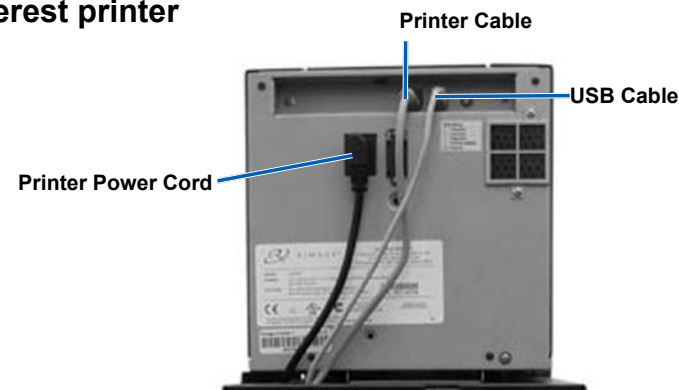


OR

Prism printer

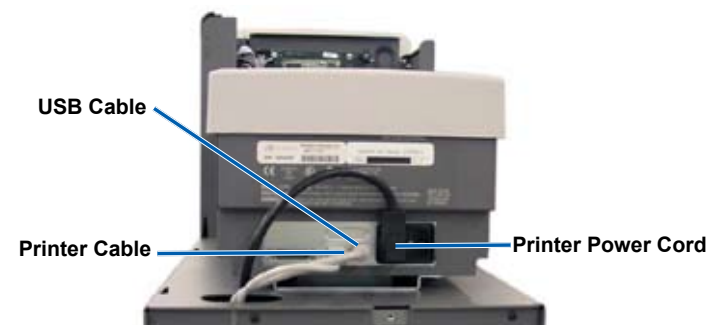


3 Pack the autoloader to be returned.

- Tape the **power cord** and **cables** to the top of the autoloader.
- Lower the **lift arm**.
- Place **tie wraps** around the shaft and through the frame, directly below the lift arm and directly above the lift arm to secure the lift arm.

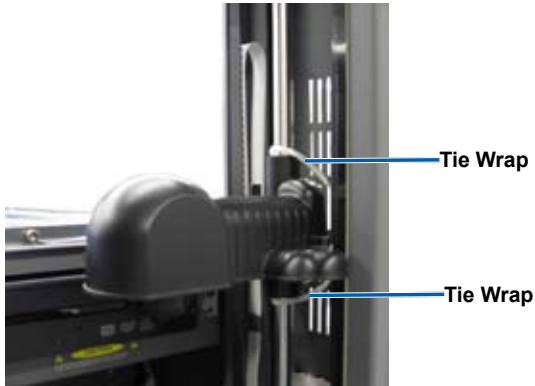

- Insert the **shipping foam** just above the carousel.
- Tape the **mailbox feed tray** to the side of the autoloader.

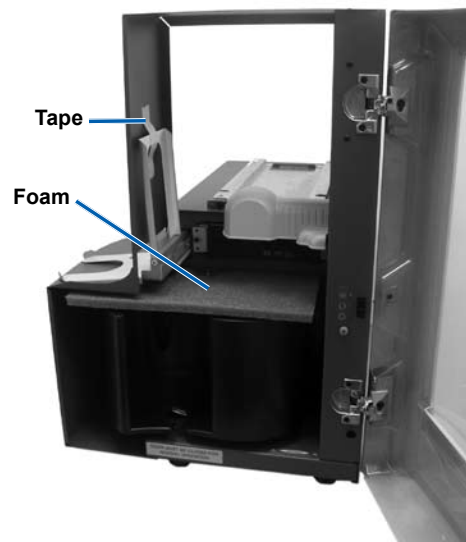

4 Unpack the replacement Producer II.

Refer to the label on the box of your replacement Producer II.

5 Pack the autoloader to be redetuned.

Refer to the packing instructions included with your replacement Producer II.

6 Set up the replacement Producer II.

Complete the steps in the setup and installation guide included with your product. The documents are also available at www.Rimage.com/Support.html. **Navigate:** Producer Family > Support - *your product* > Documents tab.

 **Note:** You are installing the same printer that you removed from the Producer II.

7 Update the Rimage software.

 **Important!** Install the appropriate service pack included with your replacement autoloader. This ensures that the recorders are supported by your software.

If no service pack was included with your replacement autoloader, be sure you have the most recent service pack installed.

Service packs and instructions are available at www.rimage.com/support.html. **Navigate:** *Product* Family > Support - Rimage *product* > Downloads Tab.